




## PAN 26

Manually-operated single-head copy router, head side movement with indirect lever. Axis movement on ball-bearing bars and bushes ensures smooth and precise operation over the years. Horizontal pneumatic clamps with low-pressure device for the operator's safety. Longitudinal and transversal stops referred to metric rods and adjustable depth stop ensure quick positioning. Possibility of performing through operations without turning the piece. Manually-controlled tracer, tracer tip in level with 3-diameter tool. Micro-mist pneumatic tool lubrication (emulsified oil).

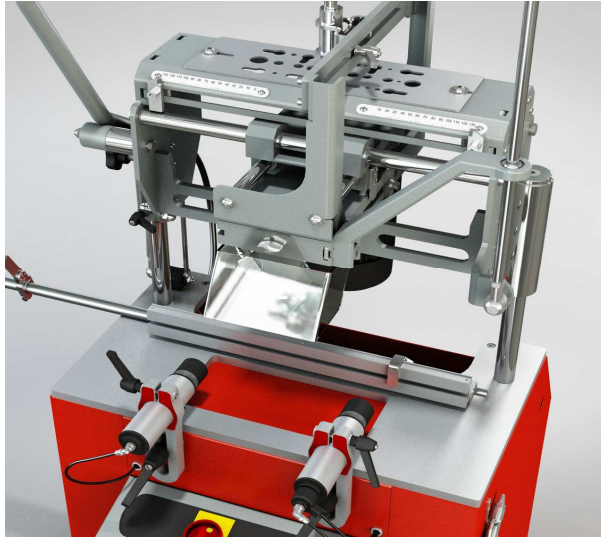

### Technical details

Three-phase power supply	380/400-50/60	Volt-Hz
Three-phase motor power	0.75	kW
Spindle speed	12000	rpm
X - Y - Z axis stroke	260-120-130	mm
Clamp capacity	150x200	mm
Max cutter diameter	10	mm
Tracer tip diameters	6-8-10	mm
Weight	110	kg

### Fittings

- Service spanner bag
- Operator's and maintenance manual with EC declaration
- Single-blade HSS cutter Ø6 L=68mm
- Single-blade HSS cutter Ø8 L=80 mm
- Collet ER16 Ø 8...7 mm
- Stop support rod L=1000 mm
- 2 disengageable stops
- Template with standard figures
- Adjustable levelling feet
- Air blowing gun for cleaning

### Accessories

- Accessories
- Profile support roller conveyor L=600 mm
- Profile support roller conveyor L=1200 mm
- Template without figures
- Disengageable stop
- Stop support rod L=1000 mm